

CABLE AND CONTROL KIT FOR LESLIE MODEL 16
011866


Installation

Make sure Amplifier is turned off before making installation of Kit.

1. Plug 5 contact of Kit into Leslie Model 16 as shown at "U" in photo.
2. Place Switch Control Box "V" at some convenient location for player.
3. Plug Line Cord from Leslie Model 16 into convenient wall outlet, and turn on switch "T".
IMPORTANT: After transporting speaker, plug Line Cord into wall outlet, turn on power switch at Leslie cabinet, push Tremolo Switch and wait 5 seconds and push again.
4. Make sure that the cross over assembly "W" is plugged into the 6 contact sockets.
5. Connect black wire at point "C". This is the common wire connected between the amplifier and speaker. Use wire nut provided.
6. Cut hot wire from amplifier to speaker and connect red and white wire "A" and "B". Use wire nuts provided.
7. To properly use wire nuts, strip each wire approximately 3/8". For further information of Model 16 Operations and Control Switch functioning, see Owner's Manual.

011866 Cable & Control Kit

011569	Adapter	026443	Housing Cover
012377	Cross-over Network	026456	Switch Housing
012385	Cable and Control Assy.	027565	Label
013235	Grommet	028076	Wire Nut
026401	Washer	029264	Socket 5 contact S2
026419	Nut	029546	Socket 6 contact S1
026427	Switch SPOT SW2	060467	Capacitor .01 1 K Volt
026435	Switch SPST SW1		

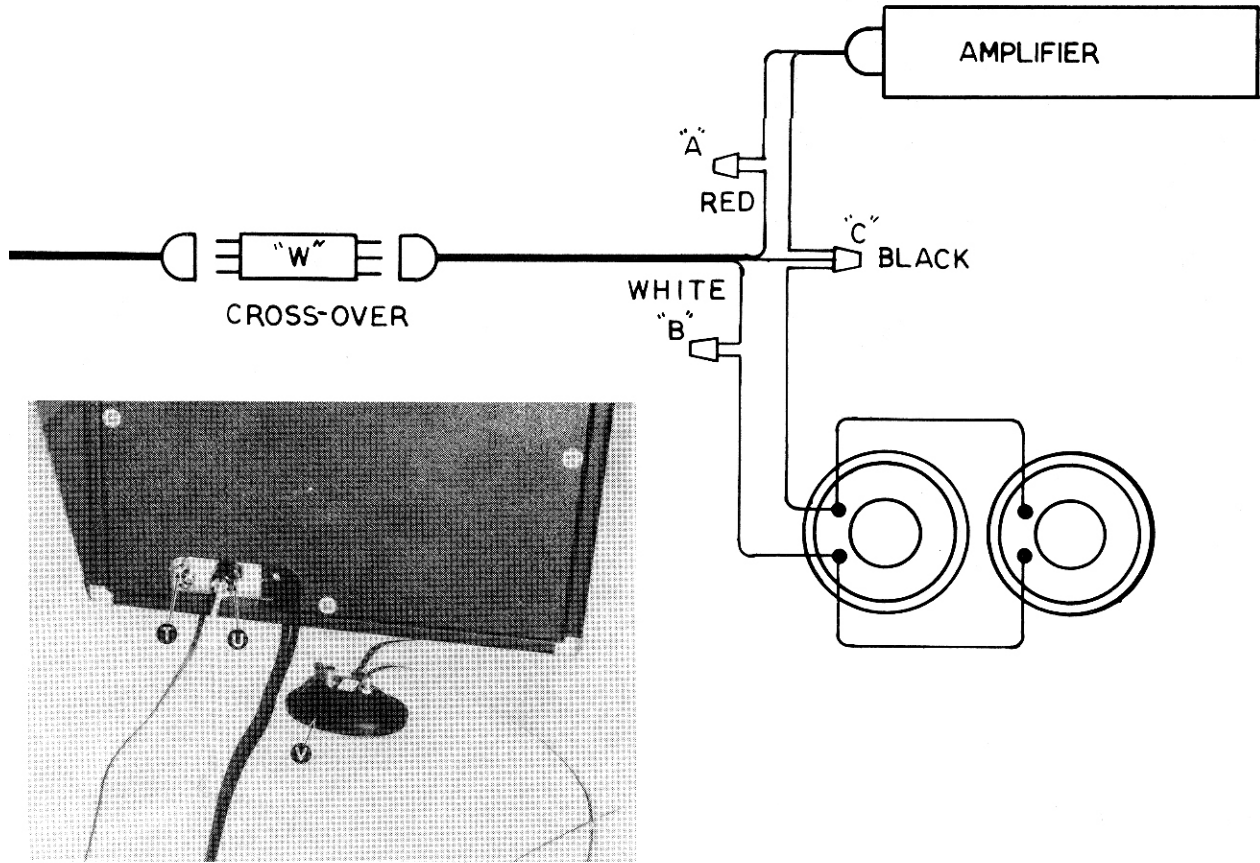

012377
CROSSOVER NETWORK

011569 UNIVERSAL
CONNECTOR

